
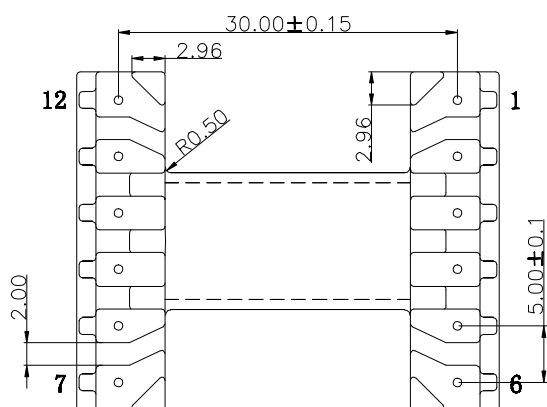
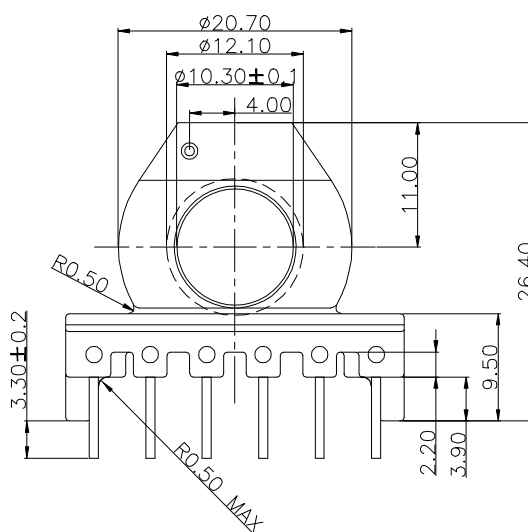
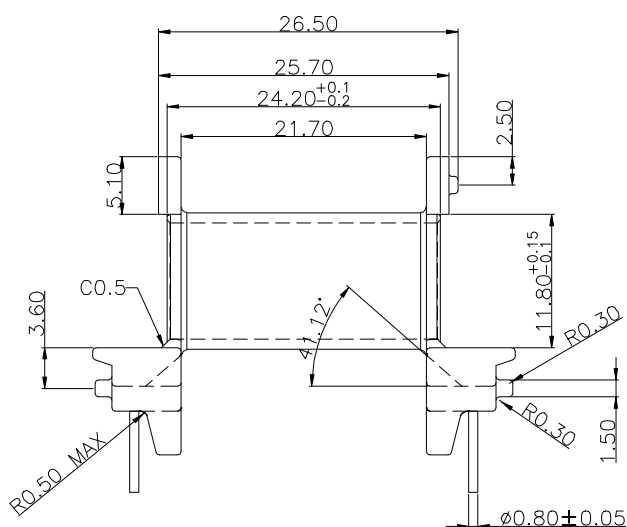
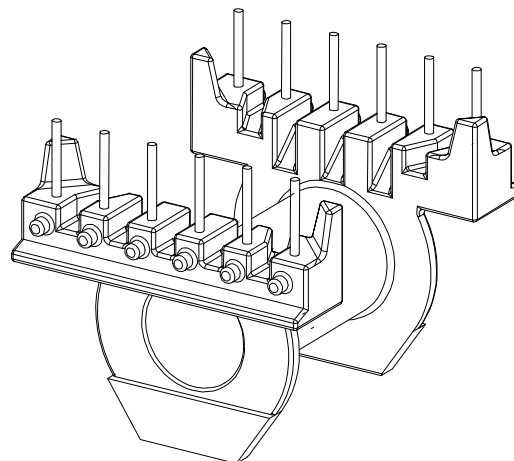


Build up your trust

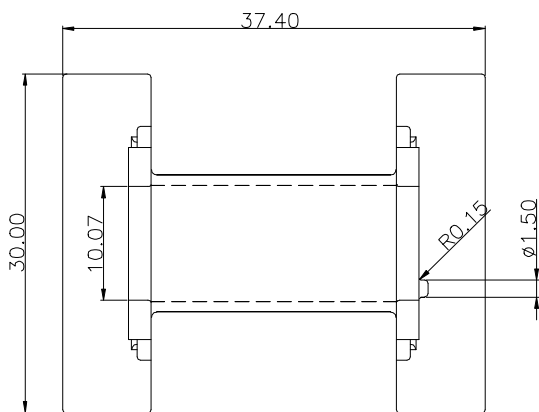

备注:

- 1: 4凸点(standoffs)平面度0.15mm Max;
- 2: 材料需耐420+/-20C 5S不能有变形, 起泡, 熔化等不良。
- 3: 未标注R角按R0.30mm。
- 4: 针脚电镀: 亮锡/厚度6~8um。
- 5: 针脚截面需至少1/2面积上锡。

TITLE: BOBBIN ERL-28 12PIN		TOLERANCES		BOBBIN MATERIAL: T375HF		UL REC. UL 94V-0	
DRAWING NO: GS-2805-1 (65-ER28-GS-01)		0<L≦4 ±0.10 4<L≦16 ±0.15 16<L≦63 ±0.20 63<L ±0.25	PIN PITCH ±0.2	PIN MATERIAL: CP WIRE		PIN TENSION LOAD: 1.5KG MIN	
 建信電子制品有限公司 GEMSTONE ELECTRONIC PRODUCTS CO.,LTD.		UNIT: MM	SCALE: 2/1	ANGLE: ±1°	DATE: 2011/12/20	REV: A0	
ADD:廣東省東莞市石排鎮石崇大道 TEL: (0769)86514918, 86514919 FAX:86514878		DRAWED: QIU		CHECK: XU ZHAN		APPROVED:	
REV.	PORTION.		BEFORE REV.			AFTER REV.	